

SS-12F48-GXXX



直柄
G-Switch P/N

Switch Height (mm)



G020=2.0 G030=3.0
G040=4.0 G050=5.0
G055=5.5 G060=6.0
G065=6.5 G070=7.0
G075=7.5 G080=8.0
G085=8.5 G090=9.0
G095=9.5 G100=10.0

G-Switch Specification:

Electrical Specifications: 1.0A/DC24V
Contact resistance (CR): ≤50mΩ
Insulation Resistance(IR): ≥100MΩ DC250V
Compressive strength (WV): AC250V 1minute
Operating temperature: -25°C~+70°C
Storage humidity: <85%RH
Electrical life: 10,000Cycles.

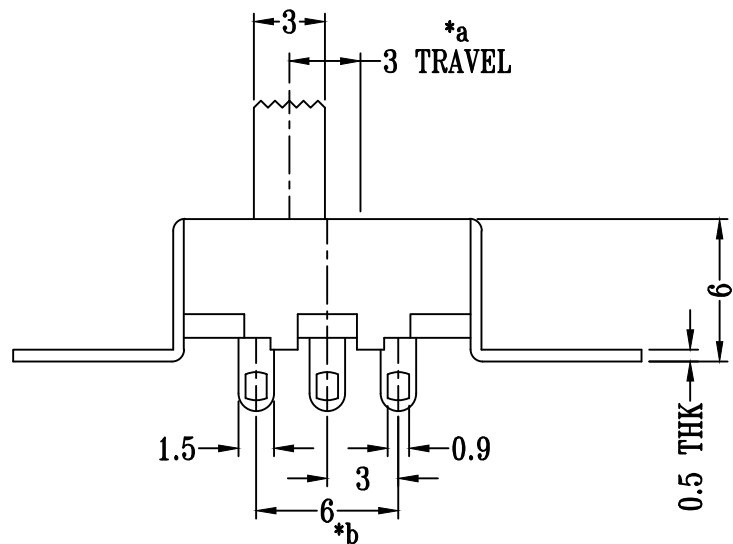

**P.C.B LAYOUT
BOTTOM VIEW**



G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

DESIGN FengFengChen DATE 2019.05.29
CHECKED DATE
APPROVED DATE
<http://www.dg-switch.com>
TEL:0769-82388879

Molde code:
SS-12F48-GXXX
REV.: X1 SCALE: 4:1 UNIT: mm
SIZE: A4 SHEET: 1/1