


- G-Switch USB-C Specification:**
1. Current rated: 5A on Vbus/1.25A on Vconn/0.25A on other
Voltage rating: 24V AC
 2. Withstanding voltage: 100V AC/minute
 3. Contact Resistance: 40mΩ Max
 4. Insulation Resistance: 100MΩ Min
 5. Operating temperature: -40 °C ~ +85 °C
 6. Mating force: 5N~20N
 7. Unmating force: 8N~20N
 8. Durability Cycle: 10,000 Cycles

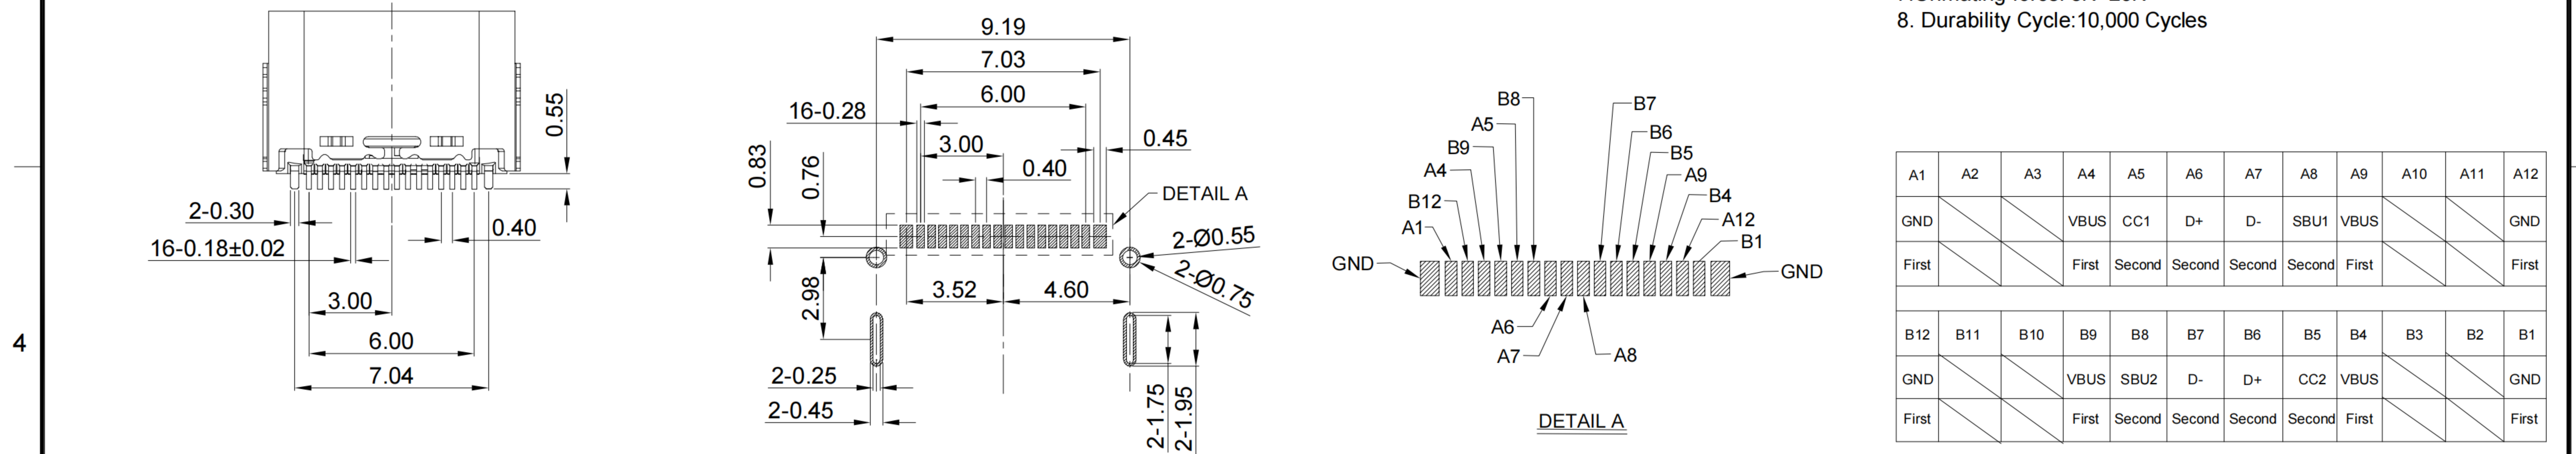

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
First			First	Second	Second	Second	Second	First			First

B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND			VBUS	SBU2	D-	D+	CC2	VBUS			GND
First			First	Second	Second	Second	Second	First			First

1	COVER SHELL	STAINLESS STEEL	NI PLATED
2	SHELL	STAINLESS STEEL	NI PLATED
3	GND PLATE	STAINLESS STEEL	---
4	MID PLATE	STAINLESS STEEL	NI PLATED
5	HOUSING	HIGH TEMPERATURE PLASTIC	Black UL 94 V-0
6	TERMINALS	COPPER ALLOY	Au PLATING ON CONTACT AREA
NO.	PARTS	MATERIAL	REMARKS



SCALE: 1:1	UNIT: mm	Title: Horizontal Type-c 16P Female	
SIZE: A4		SMT CH=1.63 H=5.9mm	
Unless otherwise General Tolerance:		Molde Code: GT-USB-7025A	
X.	±0.25	DRAWN	CHECKED
X.x	±0.20	APPROVED	DATE
X.xx	±0.15	Xia	Chen
X.xxx	±0.10	Chen	2023.02.01
X°	±5°		



REV: A0 SHEET: 1/1